
**DU180H - UPBLAST EXHAUST FAN**

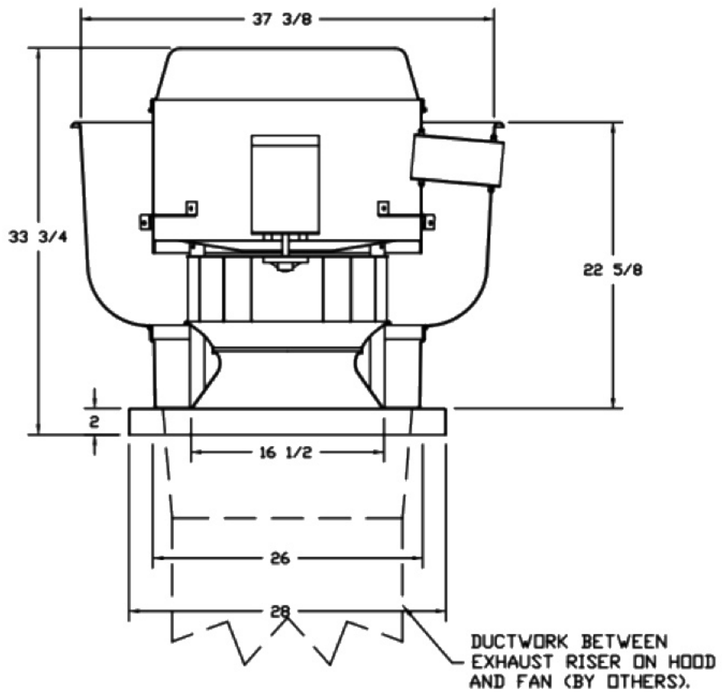


FEATURES:


- DIRECT DRIVE CONSTRUCTION (NO BELTS/PULLEYS).
- ROOF MOUNTED FANS.
- RESTAURANT MODEL.
- UL705
- VARIABLE SPEED CONTROL.
- INTERNAL WIRING.
- THERMAL OVERLOAD PROTECTION (SINGLE PHASE).
- HIGH HEAT OPERATION 300°F (149°C).

- NEMA 3R SAFETY DISCONNECT SWITCH.

NORMAL TEMPERATURE TEST
EXHAUST FAN MUST OPERATE CONTINUOUSLY WHILE EXHAUSTING AIR AT 300°F (149°C) UNTIL ALL FAN PARTS HAVE REACHED THERMAL EQUILIBRIUM, AND WITHOUT ANY DETERIORATING EFFECTS TO THE FAN WHICH WOULD CAUSE UNSAFE OPERATION.

OPTIONS

VAV PACKAGE W/ MANUAL CONTROL (VFD INCLUDED).
VFD FACTORY MOUNTED AND WIRED IN EXHAUST FAN.
VFD MOUNTING BRACKET FOR DU/DR 180 - 200.
EXHAUST FAN HEAT BAFFLE.
2 YEAR PARTS WARRANTY.

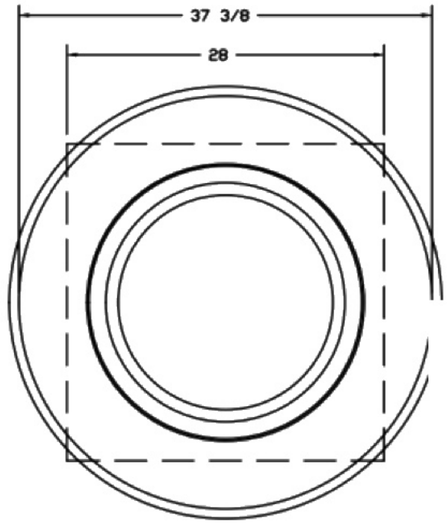


**THE KITCHEN EXHAUST**
(416) 529-9274
sales@thekitchenexhaust.com

The Kitchen Exhaust